

多种接口, 法兰和密封圈

VARIOUS COUPLINGS, FLANGES AND GASKETS



▶ 快速接口
EXPRESS COUPLINGS



▶ 巴塞罗那接口
BARCELONA COUPLINGS



▶ GFR, BSP 接口和转换接口
GFR COUPLINGS, BSP AND ADAPTOR RINGS



▶ API 接口
API COUPLINGS




▶ 可视接口
VISUALISERS



▶ 通风接口
VENTILATION COUPLINGS



▶ 法兰
FLANGES

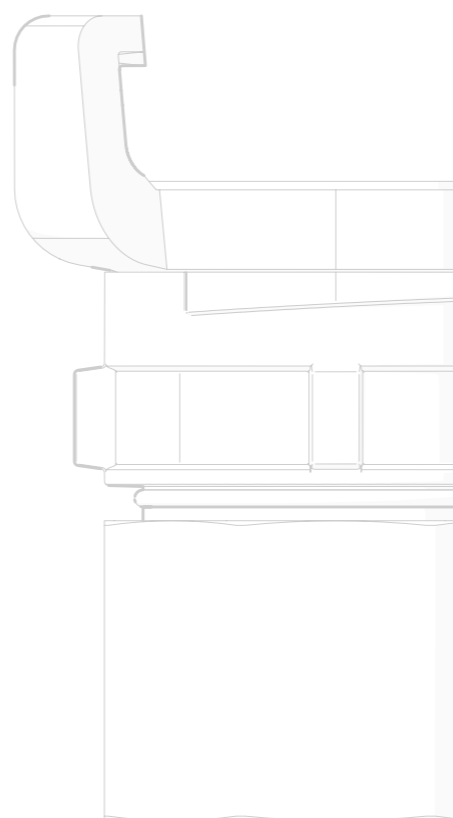

PLA_01082_Flyer CH-EN_接口_Couplings

接口
COUPLINGS



POK CHINA

博克消防装备科技有限公司

地址：北京市顺义区南彩镇彩达三街一号茂华工场5号厂房2层201室 · POK

电话：010 64667868

邮箱：info@pokchina.com sales@pokchina.com

www.pokchina.com

充满激情的创造者 / WE CREATE WITH PASSION



法国制造,符合标准,获证产品,材质有铝合金,不锈钢,青铜和聚丙烯。

French manufacturing, conform to the norms, certified, available in aluminium alloy, stainless steel, bronze and polypropylene.

接口

SYMÉTRIQUES GUILLEMIN 耦合接口 

SYMMETRIC GUILLEMIN COUPLINGS

- ▶ 尺寸: DN15 - DN150 / Dimensions: from DN15 to DN150
- ▶ 最大工作压力: PN6 - PN20 / Nominal pressure: from PN6 to PN20
- ▶ 材料: 铝合金, 不锈钢, 青铜和聚丙烯
- ▶ 多环圆凹槽水带接口, 双环圆凹槽水带接口, 螺旋式水带接口, 熔接式水带接口, 外螺纹或内螺纹。

With multi-serrated hose shank, double ribbed hose shank, helicoidal hose shank, welding shank, male of female thread

接口 DSP-AR 

DSP-AR COUPLINGS

- ▶ 获证产品带刻标 / Certified with marking
- ▶ 尺寸: DN40 - DN100 / Dimensions: from DN40 to DN100
- ▶ 最大工作压力: PN25 / Nominal pressure: PN25
- ▶ 材料: 铝合金和青铜 / Material: aluminium alloy and bronze
- ▶ 多环圆凹槽水带接口, 双环圆凹槽水带接口, 外螺纹或内螺纹

With multi-serrated hose shank, double ribbed hose shank, male of female thread


STORZ 内扣式接口 

STORZ COUPLINGS

- ▶ 尺寸: DN25 至 DN250
- ▶ 最大工作压力: PN16
- ▶ 材料: 铝合金, 青铜和黄铜
- ▶ 多环圆凹槽水带接口, 双环圆凹槽水带接口, 外螺纹或内螺纹

With multi-serrated hose shank, double ribbed hose shank, male of female thread

英式快速接口
INSTANTANEOUS & BSRT
INSTANTANEOUS & BSRT




- ▶ 尺寸: 1"1/2 - 6" / Dimensions: from 1"1/2 à 6"
- ▶ 最大工作压力: PN16 / Nominal pressure: PN16
- ▶ 材料: 铝合金和青铜
- ▶ 外螺纹或者内螺纹

Material: aluminium alloy and bronze
With male or female thread



接口 NST-NH
NST-NH COUPLINGS




- ▶ 尺寸: 1" - 6" / Dimensions: from 1" to 6"
- ▶ 最大工作压力: PN16 / Nominal pressure: PN16
- ▶ 材料: 铝合金和青铜
- ▶ 外螺纹或者内螺纹

Material: aluminium alloy and bronze
With male or female thread



MACHINO 卡式接口
MACHINO COUPLINGS



- ▶ 尺寸: DN65 至 DN80
- ▶ 最大工作压力: PN16
- ▶ 材料: 铝合金
- ▶ 外螺纹或者内螺纹

Material: aluminium alloy
Male or female thread couplings



GOST 接口
GOST COUPLINGS



- ▶ 尺寸: DN25 - DN150
- ▶ 最大工作压力: PN16
- ▶ 材料: 铝合金, 青铜和黄铜
- ▶ 多环圆凹槽水带接口, 外螺纹或内螺纹

Material: aluminium alloy, bronze and brass
With multi-serrated hose shank, male of female thread

