



低倍数泡沫枪 BRANCHPIPES - LOW EXPANSION FOAM

- ▶ 最大工作压力：PN16 / Working pressure: PN16
- ▶ 流量：200 或 400 升/分 @ 5 公斤 / Flow rate: 200 or 400 lpm @ 5 bar
- ▶ 射程：23 米或 36 米 / Range: 23 or 36 meters
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层
Surface treatment: polyester coating and hard anodisation
- ▶ 开关类型：球阀 / Valve type: ball-valve
- ▶ 开关：手柄 / Operation: by operating handle
- ▶ 发泡倍数：约 x10 / Expansion: approx. x10



低倍数中倍数联用泡沫枪 HAND NOZZLES - DUAL EXPANSION FOAM

- ▶ 最大工作压力：PN16 / Working pressure: PN16
- ▶ 流量：200 或 400 升/分 @ 5 公斤 / Flow rate: 200 or 400 lpm @ 5 bar
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层和硬质阳极氧化
Surface treatment: polyester coating and hard anodisation
- ▶ 阀门类型：球阀 / Valve type: ball-valve
- ▶ 开关：通过手柄 / Operation: by manoeuvre handle
- ▶ 发泡倍数：x10 或 x70 / Expansion: approx. x10 or x70



泡沫比例混合器 «MIXY» "MIXY" EDUCTORS

- ▶ 最大工作压力：PN16 / Working pressure: PN16
- ▶ 流量：200 或 400 升/分 @ 10 公斤 / Flow rate: 200 or 400 lpm @ 10 bar
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 配吸液软管 / Supplied with pick-up tube
- ▶ 止回阀 / Non-return valve
- ▶ 控制阀 / Control valve

接口*

COUPLINGS*

*根据客户需求可配备不同型号接口
*Products can be equipped with other types of couplings if needed



PLA_01104_Flyer CH-EN_工业_Industries



POK CHINA

博克消防装备科技有限公司

地址：北京市顺义区南彩镇彩达三街一号茂华工场5号厂房2层201室 · POK

电话：010 64667868

邮箱：info@pokchina.com sales@pokchina.com

www.pokchina.com




- OCP (MOROCCO)
- SONATRACH (ALGERIA)
- SEAL (ALGERIA)
- STIR (TUNISIA)
- AIRBUS (FRANCE)
- ALSTOM (FRANCE)
- LYONDELL BASELL (NETHERLANDS)
- EDF (FRANCE)
- ELENGY (FRANCE)

工业
INDUSTRIES



充满激情的创造者 / WE CREATE WITH PASSION

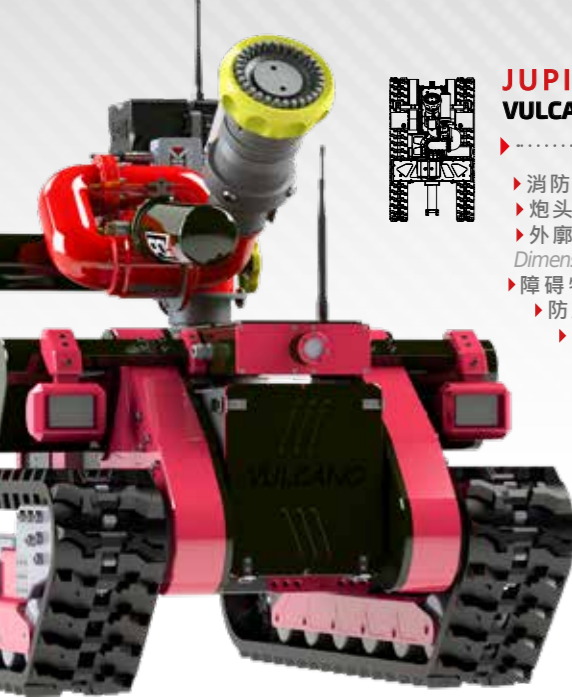

JUPITER - 消防机器人 VULCANO - ROBOT WITH MONITOR

- ▶ 消防炮：LMP65 RC / Monitor: LMP65 RC
- ▶ 炮头：Autokador 3000 / Diffuser: Autokador 3000
- ▶ 外廓尺寸 (长 x 宽 x 高): 1230 x 720 x 970 mm
Dimensions (L x l x H): 1230 x 720 x 970 mm
- ▶ 障碍物通过高度：20 cm / Obstacle clearance: 20 cm
- ▶ 防腐处理 / Anticorrosion treatment
- ▶ 空地遥控驾驶距离：300 米
Free field distance: 300 meters
- ▶ 前摄像头 720p / Front camera 720p
- ▶ 2 x LED射灯 / 2 x Leds projectors
- ▶ 3轴视频旋转-可变焦距镜头 x36 (可夜视)
Video turret 3 axis - Camera with zoom x36 (night and day)
- ▶ 热成像摄像机 / Thermographic video camera
- ▶ 续航时间：2/4 小时 / Duration: 2/4 hours
- ▶ 载重：200 kg / Payload: 200 kg
- ▶ 速度：4 km/h / Speed: 4 km/h
- ▶ 重量：200 kg / Weight: 200 kg
- ▶ 侧坡：35° / Side slope: 35°
- ▶ 坡度：45° / Slope: 45°

手动控制消防炮 MANUAL MONITORS

Montmirail, DN80 移动式自摆炮 Montmirail, DN80 portable monitor with automatic sweeping

- ▶ 安全系统，垂直仰俯和水平旋转角度手轮锁止。
Safety device, horizontal and vertical adjustment lockable knobs
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 水平旋转角度：-22,5 到 +22,5° / Horizontal movement: from -22,5° at +22,5°
- ▶ 垂直仰俯角度：+35° 到 +85° / Vertical movement: from +35° to +85°
- ▶ 最大工作压力：PN16 / Working pressure: PN16
- ▶ 流量：4000 升/分 / Flow rate: 4000 lpm

移动式消防炮 DN100 DN100 portable monitor

- ▶ 最大工作压力：PN16 / Working pressure: PN16
- ▶ 流量：7500 升/分 / Flow rate: 7500 lpm
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 垂直仰俯调整方式：手轮 / Vertical adjustment: by handwheel
- ▶ 水平旋转角度：360° 无限旋转 / Horizontal movement: on 360°
- ▶ 水平旋转调整方式：手轮 / Horizontal adjustment: by handwheel
- ▶ 垂直仰俯角度：+30° 到 +85° / Vertical movement: from +30° to +85°
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 安全系统：垂直仰俯角度+30° 限位锁止，折叠支架销，安全带
Safety: vertical adjustment lockable by pin or handle, horizontal adjustment lockable by knobs
- ▶ 选配：出水口设备，入水口接口 / Options: outlet equipment, inlet couplings


ANTENOR 拖车炮 TOWABLE ANTENOR MONITOR

- 拖车炮 / mobile units
- ▶ 牵引手柄 / Pull handle
- ▶ 2 套水带舱 水带 Ø 65 - 长 20 米
2 housing for 20 meters fire hoses PIL Ø 70
- ▶ 4 镀锌金属地面支撑 / 4 galvanized steel spikes
- ▶ «Klap Klap» 五腿折叠支架，支撑消防炮
Bracket "Klapklap" to maintain the monitor
- ▶ 选配：2 个长度 20 米 消防水带 PIL Ø 65
Option: 2 lengths of 20 meters hoses PIL Ø 70

- Antenor 消防炮炮头 / Monitor nozzle antenor
- ▶ 最大工作压力：PN16 / Working pressure: PN16
- ▶ 流量：3000 升/分 / Flow rate: 3000 lpm
- ▶ 材料：铝合金 / Material: aluminium alloy

« BELIER » 穿刺水枪 "BELIER" NOZZLE

- ▶ 最大工作压力：PN16
Working pressure: PN16
- ▶ 流量：460 升/分 @ 7 公斤
Flow rate: 460 lpm @ 7 bar
- ▶ 材料：不锈钢
Material: stainless steel
- ▶ 选配：球阀，不带手枪式握柄
Option: shutoff with ball valve without pistol handle

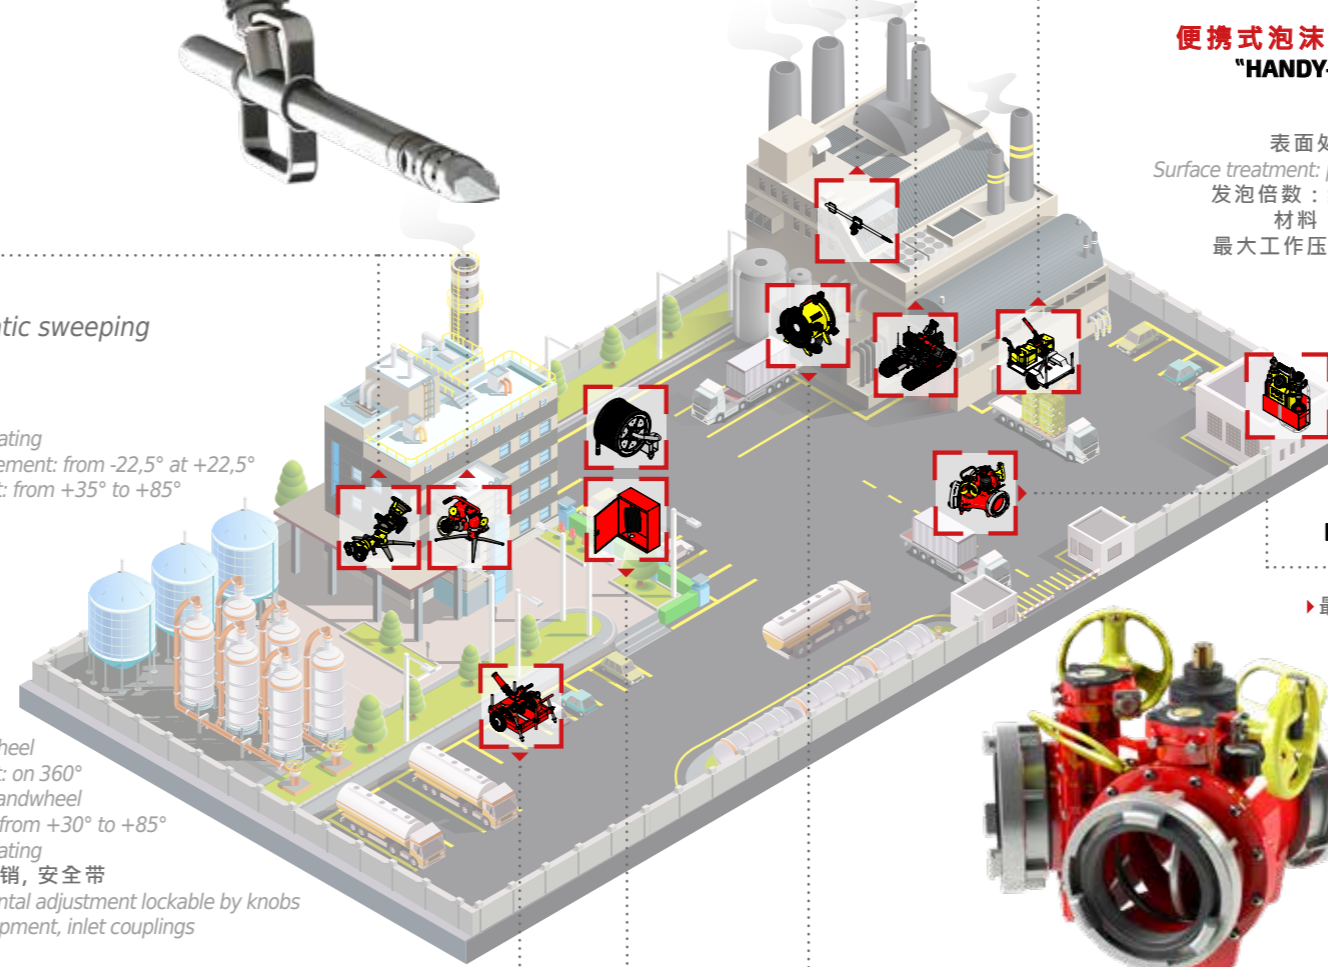

拖车 TOWABLE MONITORS

- 材料：铝合金和钢 / Material: aluminium alloy and steel
- 车轮尺寸：145 70 R13 / Wheels dimensions: 145 70 R13
- 可折叠 jockey 车轮 / Retractable "Jockey" wheel
- 信号标志：标准交通标志 / Road signalling: traffic signal
- 选配：消防炮，出口装备，入口尺寸和数量
Options: monitor, outlet equipment, dimensions, number of inlets
- 支脚承重：4x 200kg / Stands: 4x 200kg

便携式泡沫组合装置 «HANDY-FOAM» "HANDY-FOAM" PORTABLE FOAM UNIT

- 表面处理：聚酯涂层 和 硬质阳极氧化
Surface treatment: polyester coating and hard anodisation
- 发泡倍数：约 x10 或 x70 / approx. x10 ou x70
- 材料：铝合金 / Material: aluminium alloy
- 最大工作压力：PN16 / Working pressure: PN16
- 吸液百分比：0.4, 1, 3 或 6%
Suction percentage: 0.4, 1, 3 or 6%

分水器 DN150 和 DN200 DN150 AND DN200 DIVIDERS

- ▶ 最大工作压力：PN16
Working pressure: PN16
- ▶ 材料：铝合金
Material: aluminium alloy
- ▶ 表面处理：聚酯涂层
Surface treatment: polyester coating
- ▶ 开关方式：手轮
Operation: flywheel
- ▶ 选配：出/入口接口，压力表
Options: inlet/outlets couplings, pressure gauge

排烟机 MISTRAL 300 MISTRAL 300 FAN

- 最大工作压力：PN16 / Working pressure: PN16
- 额定工作压力：7 公斤 / Working pressure: 7 bar
- 材料：铝合金 / Material: aluminium alloy
- 选配：自吸式高倍数泡沫发生器，带筛网的泡沫管
Options: Self educting device, foam expansion with mesh
- 表面处理：聚酯涂层
Surface treatment: polyester coating
- 搬运手柄 / Lift handle
- 可调式装备*：3 种功效：高倍数泡沫发生器，雾化与通风，排烟
*Adjustable equipment - 3 functions: high expansion foam generator, misting and ventilation, discharge of fumes and smoke

不锈钢消防卷盘 HOSE REELS IN STAINLESS STEEL

- 最大工作压力：12 公斤 / Maximum working pressure: 12 bar
- 开关方式：手轮阀 / Shutoff: with handwheel shutoff
- 软管直径：Ø 25 / Hose: Ø 25
- 软管长度：30 米 / Hose capacity: 30 meters
- 选配：固定架 / Option: fixed support

存储柜 STORAGE CABINET

