



**2-5路手轮分水器**  
**DIVIDERS WITH FLYWHEEL VALVES 2 TO 5 OUTLETS**

全水路, 速关闭, 结构紧凑, 轻便.  
 Full waterway, quick closing, ultra compact, light.



- ▶ 额定工作压力: PN16  
 Nominal pressure: PN16
- ▶ 阀门类型: 球阀或蝶阀  
 Valve type: ball-valve or butterfly valve
- ▶ 开关: 手柄或手轮  
 Operation: by lever or flywheel
- ▶ 材料: 铝合金  
 Material: aluminium alloy
- ▶ 表面处理: 聚酯涂层  
 Surface treatment: polyester coating
- ▶ 选配: 入水/出水口接口, 压力表  
 Options: inlet/outlet couplings, pressure gauge



**熔断阀**  
**AUTOMATIC OPENING VALVE**

- ▶ 阀门带烟火触发装置  
 Valve with pyrotechnical puncher
- ▶ 额定工作压力: PN16  
 Nominal pressure: PN16
- ▶ 水路通径: 50毫米 / Waterway Ø: 50 mm
- ▶ 入水口/出水口: 法兰 2" ASA 150
- ▶ 止回阀 / Clappered valve
- ▶ 材料: 青铜和不锈钢
- ▶ 触发温度: 93°
- ▶ 电阻: 2,00 ± 0,3 Ω
- ▶ Filament resistance: 2.00 ± 0.3 Ω
- ▶ 防水等级: IP 54 / Waterproofing: IP54



**接口\***  
**COUPLINGS\***

\*根据需求, 产品可配备各种型号接口  
 \*Products can be equipped with other types of couplings if needed



PLA\_01176\_Flyer ZH-EN\_核电工业\_NuclearIndustry

**核电工业**  
**NUCLEAR INDUSTRY**



**POK SAS**


18 Cours Antoine Lavoisier - 10400 Nogent-sur-Seine - FRANCE  
 Tél. : +33 (0)3 25 39 84 78 - Fax : +33 (0)3 25 39 84 90  
 info@pok.fr export@pok.fr www.pok.fr



YouTube



充满激情的创造者 - WE CREATE WITH PASSION




## 阀门 DN205 DN205 VALVE

- ▶ 额定工作压力：PN16 / Working pressure: PN16
- ▶ 水路直径：8" / Waterway Ø: 8"
- ▶ 入水/出水口接口：Storz DN205 旋转带锁止  
Inlet / outlet couplings: swivelling DN205 Storz coupling with lock
- ▶ 压损：0,07 bar @ 380 m<sup>3</sup>/h  
Pressure loss: 0.07 bar @ 380 m<sup>3</sup>/h
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层和硬质阳极氧化处理  
Surface treatment: polyester coating and hard anodisation
- ▶ 开/关：蝶阀，折叠手柄手轮，带助力开关阀门·减速比1/30  
Opening / closing: butterfly valve with smooth opening, handwheel with folding handle, torque reducer with reducer 1/30th
- ▶ 泄水阀：可选配 / Flush valve: optional
- ▶ 泄水阀门开关：1/4 圈 / Flush valve opening: 1/4 turn


## 抗震式消防卷盘

### ANTI-SEISMIC TYPE HOSE REEL

- ▶ 最大工作压力：12 公斤 / Maximum working pressure: 7 bar
- ▶ 软管内径：DN33 / Hose diameter: DN33
- ▶ 软管长度：DN33 半刚性软管 30 或 40 米 / Hose capacity: 30 or 40 meters in DN33
- ▶ 材料：钢和铜合金 / Material: steel and copper alloy
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 水枪喷头及DMA DHT 阀门：青铜 / Branchpipe and DMA DHT nozzle: bronze
- ▶ 开关：手式开关阀门 / Opening: with handwheel shutoff
- ▶ 抗震套管：是 / Anti-seismic hose length: YES
- ▶ 选配：地面固定支架，消火栓箱，防护罩 / Options: mounting support, cabinet, cover
- ▶ 中国CCC认证产品 / Chinese approval

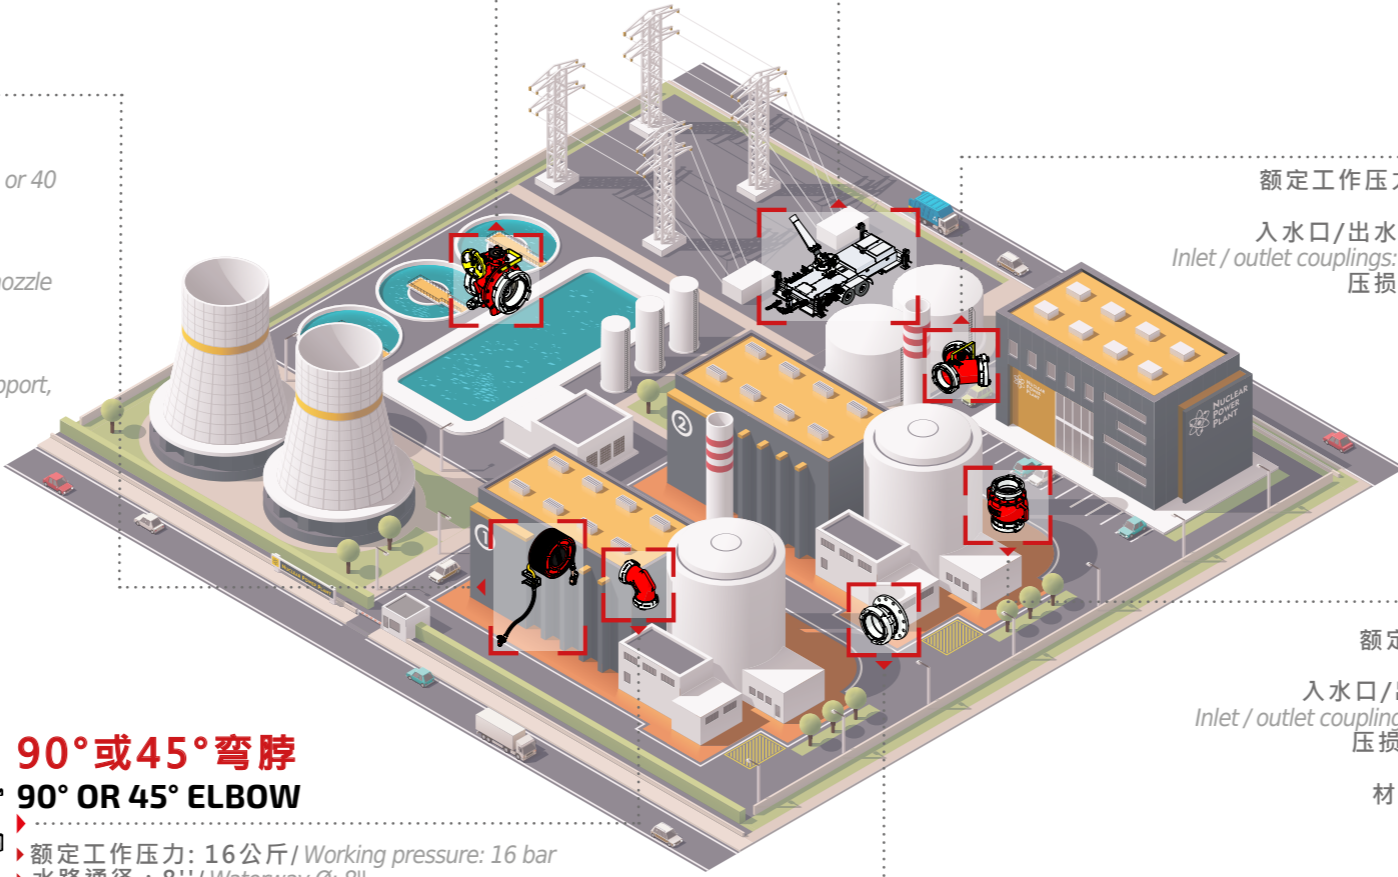

## 90°或45°弯脖 90° OR 45° ELBOW



- ▶ 额定工作压力：16 公斤 / Working pressure: 16 bar
- ▶ 水路通径：8" / Waterway Ø: 8"
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层  
Surface treatment: polyester coating
- ▶ 入水/出水口接口：旋转带锁止 Storz DN205  
Inlet / outlet couplings: swivelling DN205 Storz coupling with lock
- ▶ 提取手柄：是 / Carrying handle: YES




## "30000" 型 DN200 拖车炮 TRAILER TYPE "30000" WITH MONITOR DN200

- ▶ 流量：30000 升/分钟 / Flow rate: 30000 lpm
- ▶ 入水口：Ø 根据客户需求 / Inlet: specify the Ø
- ▶ 双轴承重：2 x 1600 kg  
Max. weight on axle tree: 2 x 1600 kg
- ▶ 材料：铝合金和钢  
Material: aluminium alloy and steel
- ▶ "Jockey" 型支撑轮：可升降 / "Jockey" wheel type: retractable
- ▶ 信号灯：标准信号牌 / Road signal: standardised plate
- ▶ 压载：1300 L / Ballast: 1300 L
- ▶ 支腿承重：4 x 10t / Stands: 4 x 10t
- ▶ 轴制动 / Brake on axle tree
- ▶ 停车制动 / Parking brake
- ▶ 选配：消防炮，输出装备，入水口尺寸、数量  
Options: monitor, outlet equipment, dimensions, number of inlets
- ▶ 排空 / Flush




## 8" 分水器 DIVIDER 8"



- ▶ 额定工作压力：16 公斤 / Working pressure: 16 bar
- ▶ 水路通径：8" / Waterway Ø: 8"
- ▶ 入水口/出水口接口：旋转带锁止 Storz DN205  
Inlet / outlet couplings: swivelling DN205 Storz coupling with lock
- ▶ 压损：0,016 公斤 @ 380 立方米/小时  
Pressure loss: 0.016 bar @ 380 m<sup>3</sup>/h
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层  
Surface treatment: polyester coating




## 8" 分水器 NON-RETURN VALVE 8"



- ▶ 额定工作压力：16 公斤 / Working pressure: 16 bar
- ▶ 水路通径：8" / Waterway Ø: 8"
- ▶ 入水口/出水口接口：旋转带锁止 Storz DN205  
Inlet / outlet couplings: swivelling DN205 Storz coupling with lock
- ▶ 压损：0,016 公斤 @ 380 立方米/小时  
Pressure loss: 0.01 bar @ 380 m<sup>3</sup>/h
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层  
Surface treatment: polyester coating
- ▶ 阀门类型：复位弹簧轴向止回阀  
Valve type: axial with compression spring



## STORZ DN205 接口 DN205 STORZ COUPLING



- ▶ 额定工作压力：16 公斤 / Working pressure: 16 bar
- ▶ 水路通径：8" / Waterway Ø: 8"
- ▶ 材料：铝合金和不锈钢  
Material: aluminium alloy and stainless steel
- ▶ 密封圈：腈 / Gaskets: nitrile
- ▶ 弹簧锁锁止系统  
Locking device with handle
- ▶ 旋转带锁止 Storz DN205 接口：  
螺纹接口 Ø 205 带 3 个卡面，  
配合旋转带锁止 Storz 接口·STORZ 或法式转换接口·  
或 DN200 ISO PN16 法兰  
Swivelling DN205 Storz coupling with lock mounting on:  
Ø 205 ribbed hose shank with 3-part clamp ring,  
adaptor coupling with Storz or symmetric coupling  
or DN200 ISO PN16 flange

