

遥控系统 TECHNO V2 REMOTE CONTROL SYSTEM TECHNO V2

优势

- ▶ 得益于它的无级变速控制系统，消防炮极易操控。
- ▶ 单人操作控制台即可控制任意一个消防炮。
- ▶ 自动模式下消防炮会同时自摆。
- ▶ 每台消防炮可以设置20个自摆控制点。
- ▶ 阀门控制
- ▶ 消防炮当前动作档位显示在操作台屏幕显示器上。
- ▶ 可设置展开攻击位置和休眠位置
- ▶ 消防炮可通过插头接入控制柜，即插即用。
- ▶ 可自动配对接热像仪（非POK供品）
- ▶ 可调节定时继电器，用于触发自动模式
- ▶ 能够直接调节显示器连接到机柜上的控制面板

LEADING EDGE

- ▶ Excellent reactivity of the monitors thanks to its progressive speed control
- ▶ Control panel allowing manual monitoring of one or the other monitor by a single operator
- ▶ Simultaneous automatic sweeping of monitors
- ▶ Possible 20-point sweep setting for each of the monitors
- ▶ Valve control
- ▶ Display of the monitor position on the control panel screen
- ▶ Configurable attack and stow position
- ▶ Link between the cabinets and the POK monitors via Plug and Play connector
- ▶ Automatic triggering mode can be linked to thermal cameras (not supplied by POK)
- ▶ Adjustable time delay relay for triggering the automatic mode
- ▶ Ability to adjust monitors directly connected to the control panel on the cabinets




技术参数

- ▶ 配电箱尺寸：800 x 600 x 250 毫米或 400 x 400 x 200 毫米
- ▶ 遥控器重量：2 kg
- ▶ 系统连接方式：电线
- ▶ 交流方式：bus CANOPEN
- ▶ 控制柜防水等级：IP66
- ▶ 网络覆盖直径：200米
- ▶ 电池（可选配）：24 Vdc / 9A.h
- ▶ 续航里程（2块电池）：2小时
- ▶ 遥控器控制继电器可实现干接点控制阀门
- ▶ 彩色显示器，显示屏尺寸 4,3"，分辨率 480 x 272 像素，亮度 440 cd/m²，背光按钮

TECHNICAL CHARACTERISTICS

- ▶ Cabinet dimensions: 800 x 600 x 250 mm or 400 x 400 x 200 mm
- ▶ Transmitter weight: 2 kg
- ▶ System type: wired
- ▶ Communication: CANOPEN bus
- ▶ Cabinet waterproofing: IP66
- ▶ Possible network length: 200 meters
- ▶ Batteries (optional): 24 Vdc / 9A.h
- ▶ Battery life (version with 2 batteries): 2 hours
- ▶ Transmitter controlled relay for valve control by dry contact
- ▶ Colour display, screen size 4.3", resolution 480 x 272 pixels, brightness 440 cd/m², backlit buttons

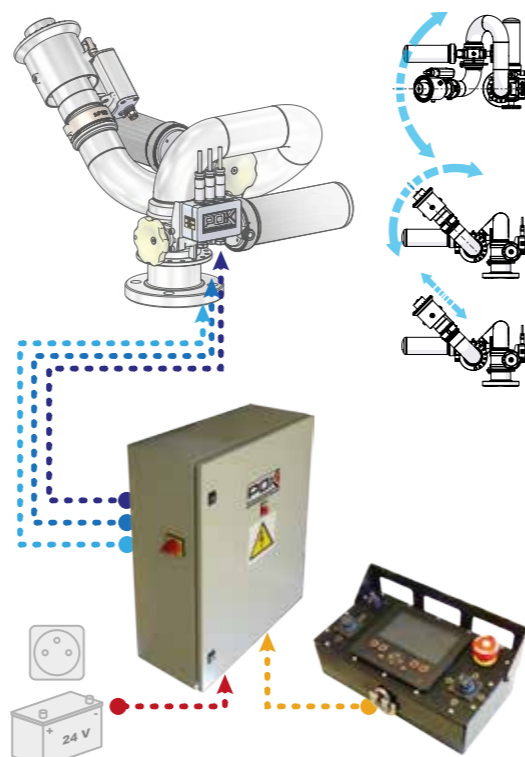

PLA_01197_Flyer ZH-EN_废品回收工厂_RecyclingFactory

废品回收工厂
WASTE RECYCLING SITE

POK
FIREFIGHTING EQUIPMENT



POK
FIREFIGHTING EQUIPMENT

POK SAS

18 Cours Antoine Lavoisier - 10400 Nogent-sur-Seine - FRANCE
Tél. : +33 (0)3 25 39 84 78 - Fax : +33 (0)3 25 39 84 90
info@pok.fr export@pok-fire.com www.pok.fr



La FRENCH FAB


You Tube



创造源于激情 - WE CREATE WITH PASSION




DN65不锈钢消防炮
DN65 MONITOR, IN STAINLESS STEEL



电控消防炮, 全部远程遥控操作, 盐雾环境
Fully remote-controlled motorised monitor for distant control, salt atmosphere.

- ▶最大工作压力:16公斤 / Working pressure: PN16
- ▶水路直径: 2''1/2 / Waterway Ø: 2.5"
- ▶入水口: 法兰 2''1/2 ASA 150 / Inlet: flange 2.5" ASA 150
- ▶材料: 不锈钢和青铜 / Material: stainless steel and bronze
- ▶水平旋转角度: -170° 至 +170°
Horizontal movement: from -170° to +170°
- ▶水平旋转调节方式: 电动和手动调节
Horizontal adjustment: motorised and spare handwheel
- ▶垂直仰俯角度: -90° 至 +90° / Vertical movement: from -90° to +90°
- ▶垂直仰俯调节方式: 电动和手动调节
Vertical adjustment: motorised and spare handwheel
- ▶电源: 24V CC / Power supply: 24V CC
- ▶动作速度: 22°/秒 / Speed: 22°/s
- ▶选配: 入水口法兰, 输出装备, 控制系统
Options: inlet flange, outlet equipment, control system

DN65铝合金消防炮
DN65 MONITOR, IN ALUMINIUM ALLOY




电控消防炮, 全部远程遥控操作。
Fully remote-controlled motorised monitor for distant control.

- ▶最大工作压力: 16 公斤 / Working pressure: 16 bar
- ▶水路直径: 2''1/2 / Waterway Ø: 2.5"
- ▶入水口: 法兰 DN80 PN16 / Inlet: flange DN80 PN16
- ▶材料: 铝合金 / Material: aluminium alloy
- ▶表面处理: 聚酯涂层
Surface treatment: polyester coating
- ▶水平旋转角度: 360° / Horizontal movement: on 360°
- ▶水平旋转调节方式: 电动和手动调节
Horizontal adjustment: motorised and spare handwheel
- ▶垂直仰俯角度: -60° 至 +90° / Vertical movement: from -60° to +90°
- ▶垂直仰俯调节方式: 电动和手动调节
Vertical adjustment: motorised and spare handwheel
- ▶电源: 24V CC / Power supply: 24V CC
- ▶动作速度: 22°/秒 / Speed: 22°/s
- ▶选配: 入水口法兰, 输出装备, 电控系统
Options: inlet flange, outlet equipment, control system



RIA - 消防卷盘
HOSE REELS




回旋式 - 消防卷盘带半刚性软管和喷枪, 软管内径规格: DN19, DN25 或 DN33。
Rotating - Swinging - With hose and diffuser DN19, DN25 or DN33.

- ▶最大工作压力: DN19: 12 公斤, DN25: 12 公斤, DN33: 7 公斤
Maximum working pressure: DN19: 12 bar, DN25: 12 bar, DN33: 7 bar
- ▶产品认证: CE0333 和 NF EN 671-1 / Certification: CE0333 and NF EN 671-1
- ▶软管长度: 20/30 米 / Hose capacity: 20/30 meters
- ▶材料: 不锈钢和青铜 / Material: steel and brass
- ▶表面处理: 聚酯涂层 / Surface treatment: polyester coating
- ▶开关: 通过1/4开关或手轮开关(DN19 和 DN25)或 (DN33)
Operation: 1/4 turn shutoff or handwheel shutoff (DN19 or DN25) or handwheel shutoff (DN33)
- ▶欧洲喷枪有三个档位: 关闭, 开花和直流
European diffuser with 3 positions: closed, spray angle and straight jet
- ▶选配: 地面固定支架, 橱柜, 防尘罩
Options: mounting support to fix to the floor, cabinet, protecting cover



RIA - 不锈钢消防卷盘
HOSE REELS IN STAINLESS STEEL



回旋式 - 消防卷盘带青铜喷枪和DN33半刚性软管。
Rotating - Swinging - With diffuser in brass, hose DN33.


- ▶最大工作压力: 7 公斤
Maximum working pressure: 7 bar
- ▶半刚性软管长度: 20 或 30 米 / Hose capacity: 20 and 30 meters
- ▶材料: 不锈钢和铜合金 / Material: stainless steel and copper alloy
- ▶欧洲喷枪有三个档位: 关闭, 开花和直流
European diffuser with 3 positions: closed, spray angle and straight jet
- ▶选配: 地面固定支架, 防尘罩
Options: mounting support to fix to the floor, protecting cover

消防枪 POKATAK - POKADOR - POKINOR




轻便, 铝合金, 硬质阳极氧化。
Light, in anodised aluminium alloy.

- ▶流量: 40 至 1000 升/分
Flow rate: from 40 to 1000 lpm
- ▶入水口旋转接口 / Swivel inlet coupling
- ▶最大工作压力: 16公斤
Nominal pressure: PN16
- ▶额定工作压力: 6 公斤 / Working pressure: 6 bar
- ▶阀门: 球阀
Valve type: ball-valve
- ▶开关: 通过操作手柄
Operation: by operating handle
- ▶高压清洗档: 是 / Flush: YES
- ▶材料: 铝合金 / Material: aluminium alloy
- ▶表面处理: 硬质阳极氧化 / Surface treatment: hard anodisation
- ▶选配: 低倍数泡沫管 · 中倍数泡沫管
Options: low or medium expansion foam attachment

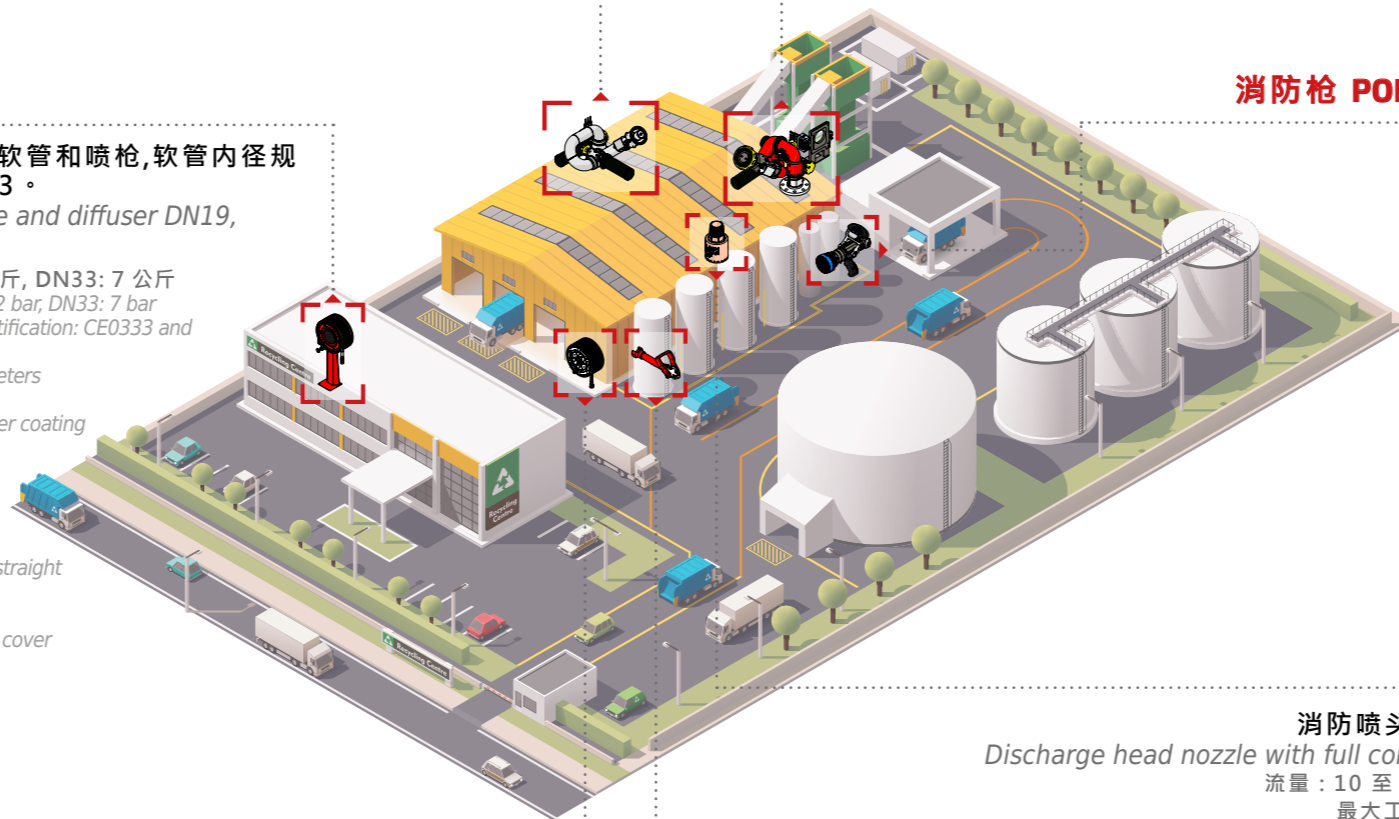

消防喷头 DELUGE NOZZLE




消防喷头可锥形喷射, 用于天花板安装。
Discharge head nozzle with full cone diffusion for ceiling installation.

- ▶流量: 10 至 240 升/分 / Flow rate: from 10 to 240 lpm
- ▶最大工作压力: 16公斤 / Nominal pressure: PN16
- ▶额定工作压力: 6 或 7 公斤 / Working pressure: 6 or 7 bar
- ▶材料: 青铜 / Material: bronze



消防喷头 DMA 和 DMB
DMA AND DMB DELUGE NOZZLE



消防喷头开关有3个档位: 关闭, 开花或鸭嘴喷射, 直流。
Deluge nozzle shutoffs with 3 positions: closed, spray stream or flat stream, straight jet.

- ▶水路直径 (毫米): 25/8-8, 40/14-14 和 65/18-18
Waterway Ø (mm): 25/8-8, 40/14-14 and 65/18-18
- ▶最大工作压力: 16公斤 / Nominal pressure: PN16
- ▶阀门: 球阀 / Shutoff: with ball valve
- ▶材料: 铝合金或青铜
Material: aluminium alloy or bronze
- ▶选配: 喷枪, 有扑灭带电火模式
Options: branchpipes, available with spray pattern for electrical fire

